

Filterless enclosure air conditioner




Description

| | |
|----------------------------|---------------------------|
| Order Number: | 42721001 |
| Brand Name: | SLIMLINE |
| Color: | RAL 7035 |
| Housing Material: | Mild steel, powder coated |
| Ingress protection: | TYPE 12 |
| Approvals: | CE / cURus |


Technical data

| | |
|--|--|
| Cooling capacity 95F/95F: | 4100 BTU |
| Cooling capacity 95F/122F: | 2970 BTU |
| Compressor type: | Rotary piston compressor |
| Refrigerant / GWP: | R134a / 1430 |
| Refrigerant charge: | 410 g / 14.5 oz |
| High / low pressure: | 37 / 9.6 bar 536 / 140 psig |
| Operating temperature range: | 50°F - 131°F |
| Air volume flow (system / unimpeded): | Ambient air circuit: 253 / 706 cfm Cabinet air circuit: 118 / 324 cfm |
| Mounting: | Wall mounted / Recessed |
| Dimension H x W x D: | 49.21 x 15.55 x 5.71 in. |
| Weight: | 88 lbs. |
| Cut out dimensions: | 48.46 x 14.80 in. |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Current 95F95F: | 8 A |
| Starting current: | 37 A |
| Max. current: | 10 A |
| Nominal power 95F95F: | 900 W |
| Max. power: | 1.1 kW |
| Fuse: | 16 A (T) |
| Max circuit ampacity: | 15 A |
| Short-circuit current rating: | 5 kA |
| Rated current compressor: | 37 A |
| Full load current fans: | 7.8 A |
| Connection: | Connection terminal block |


Performance graph:

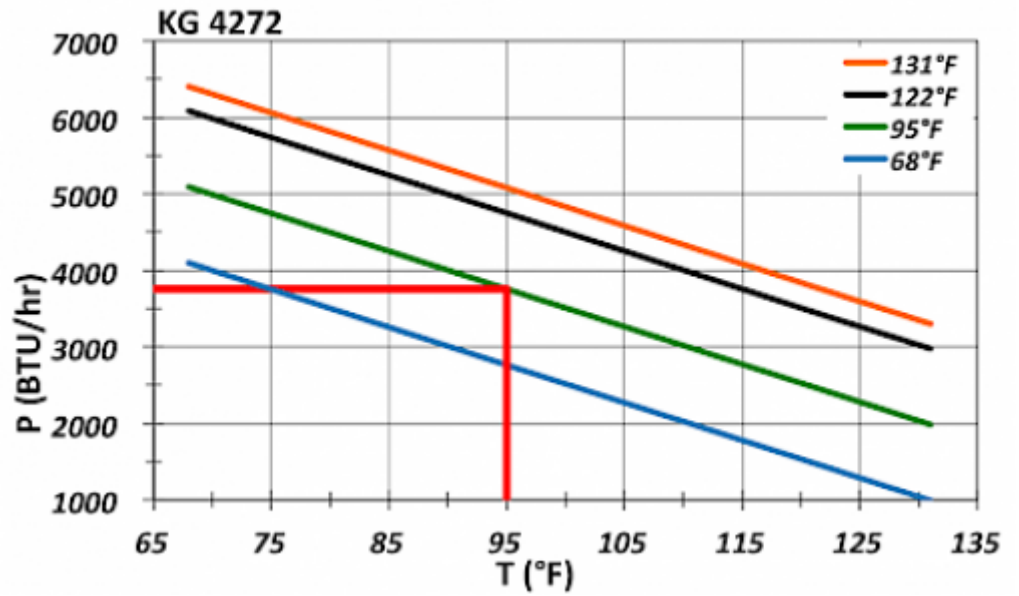

Air flow:

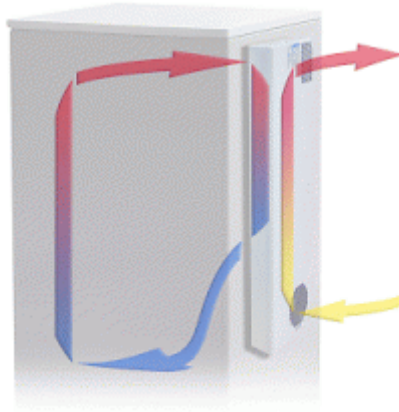

Cut out dimensions:

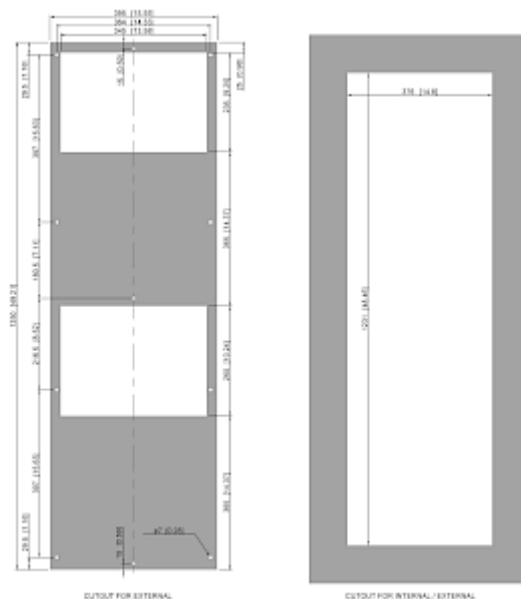

Order Information

| | |
|-----------------------|----------------------|
| Box dimensions | 1,347 x 496 x 204 mm |
| Gross weight | 45.5 kg |
| Taric code | 84158200 |
| GTIN (EAN) | 5350604371194 |