

Filter Fan



Description


| | |
|----------------------------|--|
| Order Number: | 4830A4100 |
| Brand Name: | SOLIFLEX |
| Color: | RAL 7035 |
| Housing Material: | ABS Plastic |
| Ingress protection: | IP 54, Type 12, 3R |
| Note: | Umgekehrter Luftstrom |
| Optional: | Different housing colours available on request With NEMA 3R protection part no. 4830A4130 |
| Approvals: | CE, cURus, cULus |

Technical data



| | |
|-------------------------------------|--|
| Operating temperature range: | 14°F - +131°F |
| Air volume flow unimpeded: | 324 cfm |
| Static pressure: | 0.72 inH2O @ 50Hz / 0.78 inH2O @ 60Hz |
| Dimension H x W x D: | 12.8 x 12.8 x 6.3 inch |
| Weight: | 6.8 lbs |
| Cut out dimensions: | 11.5 x 11.5 (+0.06) inch |
| Voltage / Frequency: | 230 V ~ 50/60 Hz |
| Rated current: | 0.31 A / 0.35 A |
| Power consumption: | 70 W / 85 W |
| Degree of separation: | 85% - DIN 24185 |
| Wall thickness: | 0.06 - 0.10 in. |
| Filter class: | G3 according to EN 779 |
| Installation: | Elastic clips |
| Noise level: | 65.3 dB(A) @ 50 Hz 68.1 dB(A) @ 60 Hz |

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

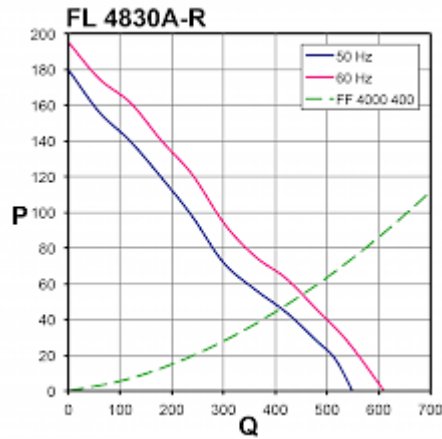

Cut out dimensions:

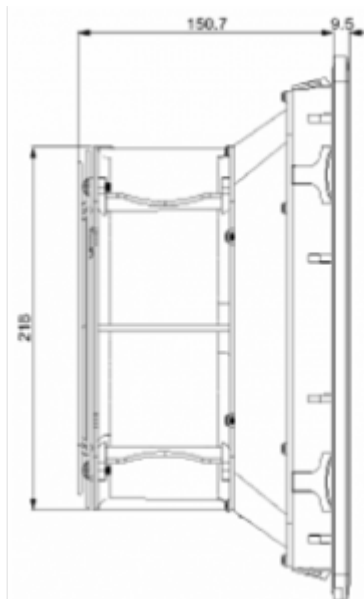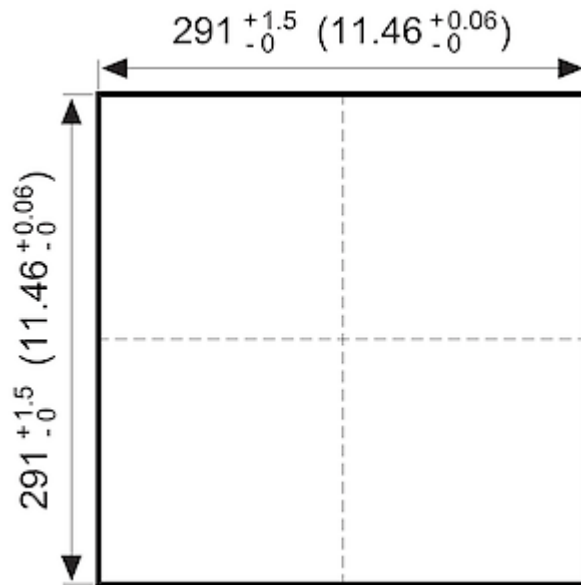

Order Information

| | |
|--------------------|---------------|
| In RAL 9005 | 4830A4103 |
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100626 |