

## Thermoelectric cooler



## Description


<b>Order Number:</b>	3200308
<b>Brand Name:</b>	SoliTherm Peltier
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus

## Technical data


<b>Cooling capacity 95F/95F:</b>	682 BTU
<b>Operating temperature range:</b>	-4°F - 158°F
<b>UL temperature range:</b>	-4°F - 149°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 70 / 153 cfm Cabinet air circuit: 70 / 153 cfm
<b>Mounting:</b>	Recessed
<b>Dimension H x W x D:</b>	400 x 180 x 170 (76+94) mm
<b>Weight:</b>	22 lbs.
<b>Cut out dimensions:</b>	14.6 x 6.1 inch
<b>Voltage / Frequency:</b>	48 V DC
<b>Current 95F95F:</b>	4.7 A
<b>Starting current:</b>	9.5 A
<b>Max. current:</b>	7.5 A
<b>Nominal power 95F95F:</b>	226 W
<b>Max. power:</b>	360 W
<b>Fuse:</b>	10 A (T)
<b>Connection:</b>	Connection terminal block

**Performance graph:**


**T = Ambient temperature**  
**P = Cooling capacity**

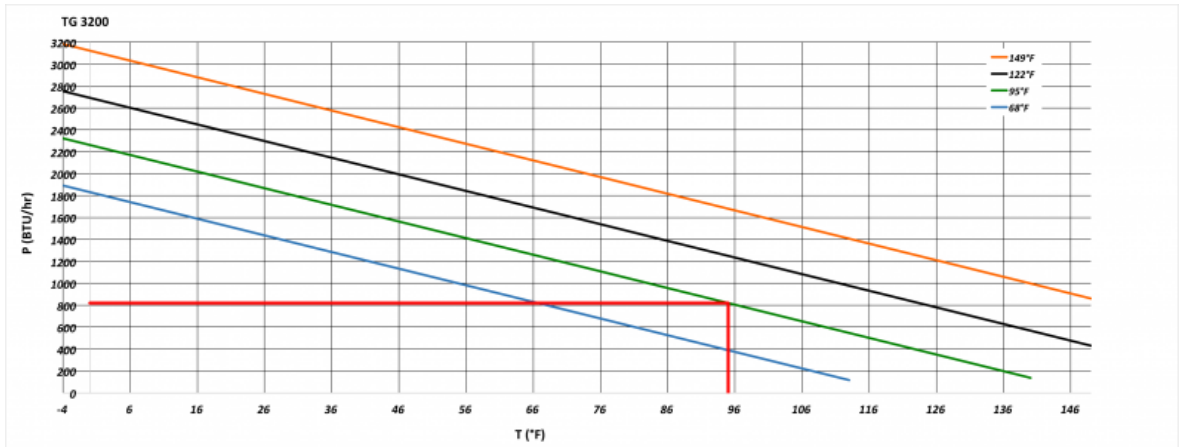

**Air flow:**

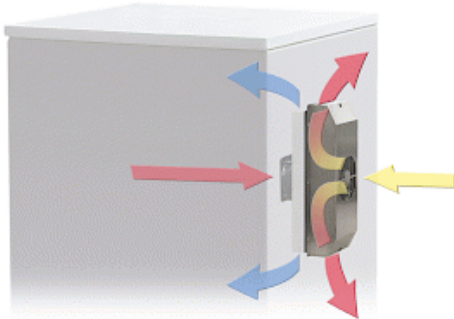

**Cut out dimensions:**

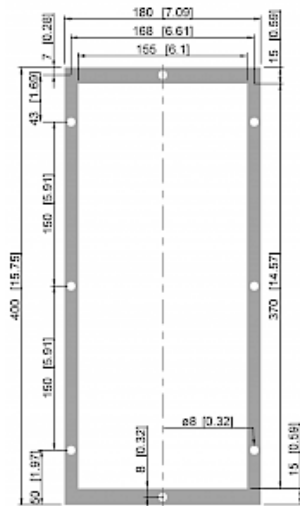

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	32003084
<b>Verpackungsmaße</b>	486.6 x 205 x 183.5 mm
<b>Bruttogewicht</b>	12 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604350366