

Filter Fan



Description


| | |
|----------------------------|---|
| Order Number: | 4220A3000 |
| Color: | RAL 7035 |
| Housing Material: | ABS Plastic |
| Ingress protection: | IP 54, Type 12, 3R |
| Optional: | # 4220A3003 black 4220A3033 black, NEMA 3R |
| Approvals: | CE, cULus, CSA |

Technical data



| | |
|-------------------------------------|---|
| Operating temperature range: | 14°F - +131°F |
| Air volume flow unimpeded: | 29 cfm |
| Static pressure: | 0.25 inH2O |
| Dimension H x W x D: | 5.9 x 5.9 x 2.9 inch |
| Weight: | 1.8 lbs |
| Cut out dimensions: | 4.9 x 4.9 (+0.06) inch |
| Voltage / Frequency: | 120 V ~ 60 Hz |
| Rated current: | 0.18 A |
| Power consumption: | 15 W |
| Degree of separation: | 85% - DIN 24185 |
| Wall thickness: | 0.04 - 0.08 in. |
| Filter class: | G3 according to EN 779 |
| Installation: | Elastic clips or by 4 self-threading screws |
| Noise level: | 48 dB(A) @ 50 Hz 54 dB(A) @ 60 Hz |

Air flow:

Q = Air flow [m3/h]
P = Static pressure [Pa]

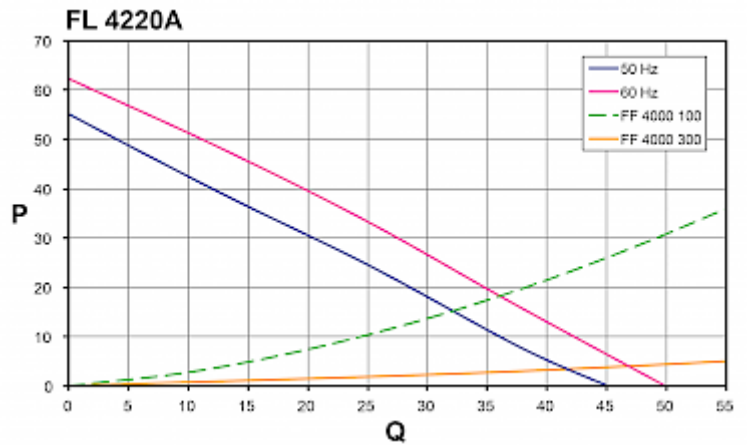

Cut out dimensions:

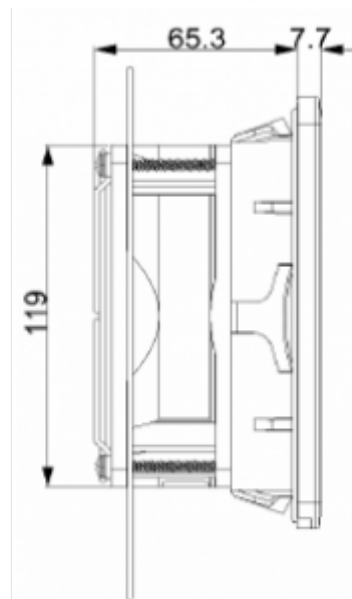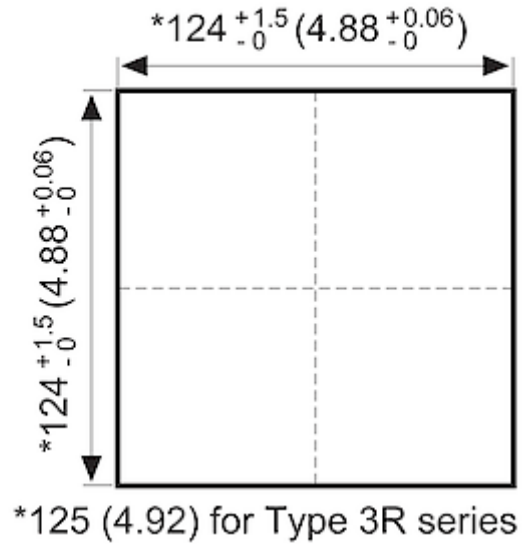

Order Information

| | |
|---|---------------|
| With NEMA 3R protection part no. | 4220A3030 |
| Taric code | 84145915 |
| GTIN (EAN) | 5350604100312 |