

Filter Fan



Description


Order Number:	4620A4000
Brand Name:	SOLIFLEX
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	IP 54, Type 12, 3R
Optional:	# 4620A4003 black # 4620A4033 black, NEMA 3R
Approvals:	CE, cURus, cULus, CSA

Technical data


Operating temperature range:	14°F - +131°F
Air volume flow unimpeded:	135 cfm / 159 cfm
Static pressure:	0.46 inH2O @ 50Hz 0.62 inH2O @ 60Hz
Dimension H x W x D:	9.8 x 9.8 x 4.9 inch
Weight:	3.3 lbs
Cut out dimensions:	8.8 x 8.8 (+0.06) inch
Voltage / Frequency:	230 V ~ 50/60 Hz
Rated current:	0.134 A / 0.16 A
Power consumption:	32 W / 36 W
Degree of separation:	85% - DIN 24185
Wall thickness:	0.06 - 0.10 in.
Filter class:	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	50 dB(A) @ 50 Hz 55 dB(A) @ 60 Hz

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

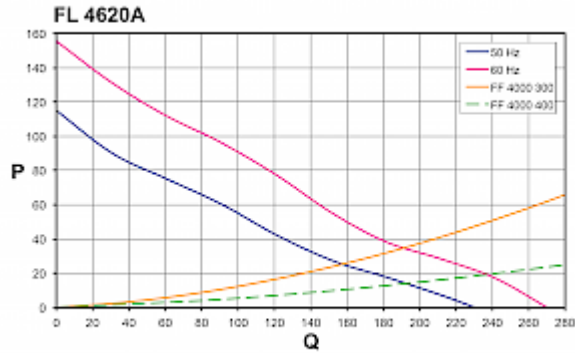

Cut out dimensions:

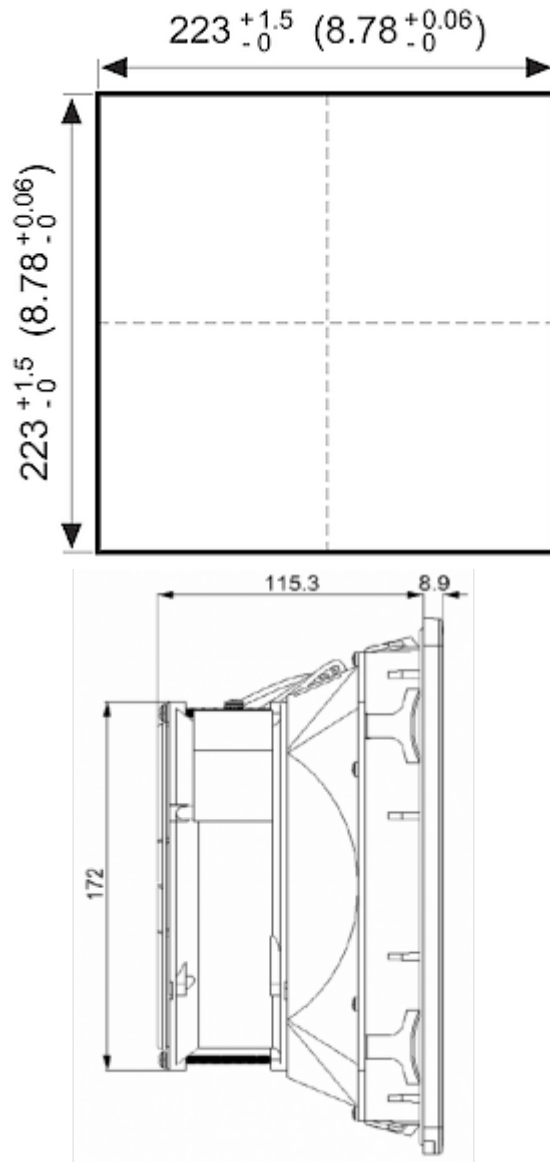

Order Information

In RAL 9005	4620A4003
With NEMA 3R protection part no.	4620A4033
Taric code	84145915
GTIN (EAN)	5350604100527