

## Thermoelectric cooler




### Description

<b>Order Number:</b>	6155303
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	510 BTU
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 70 /153 cfm Cabinet air circuit: 35 / 100 cfm
<b>Mounting:</b>	Recessed
<b>Dimension H x W x D:</b>	500 x 330 x 190 (130+60) mm
<b>Weight:</b>	36 lbs
<b>Cut out dimensions:</b>	302 x 472 mm
<b>Voltage / Frequency:</b>	120 V, 230 V
<b>Current 95F95F:</b>	1.4 A @ 120 V 0.7 A @ 230 V
<b>Starting current:</b>	2.1 A @ 120 V 1.1 A @ 230 V
<b>Max. current:</b>	1.5 A @ 120 V 0.8 A @ 230 V
<b>Nominal power 95F95F:</b>	170 W
<b>Max. power:</b>	180 W
<b>Fuse:</b>	3 A (T) @ 120 V 2 A (T) @ 230 V
<b>Connection:</b>	4 pole power connector 5 pole connector for signals

**Performance graph:**

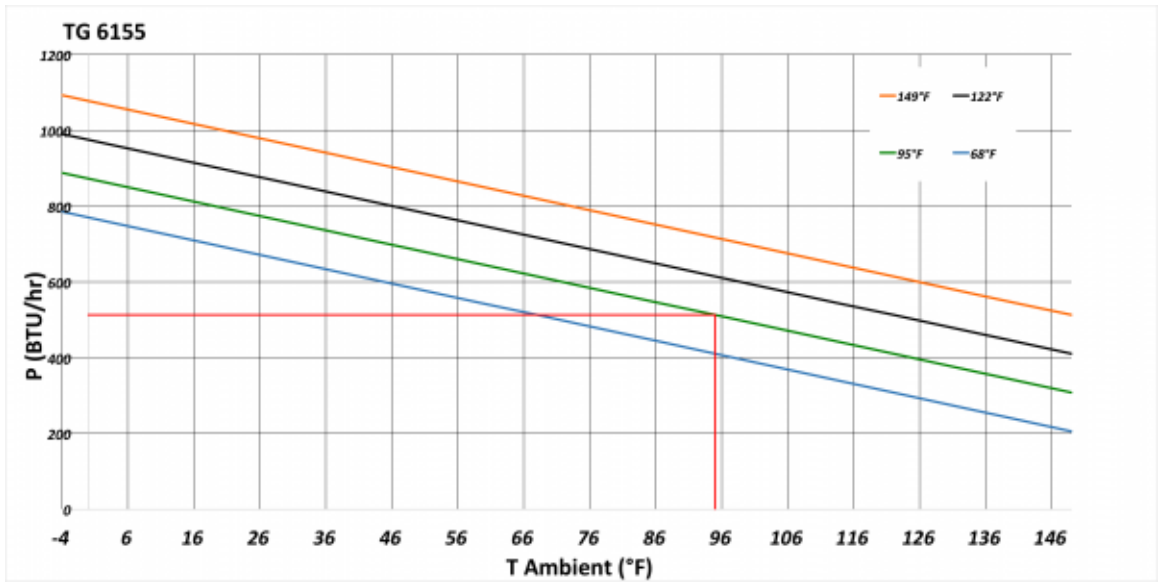

**Cut out dimensions:**

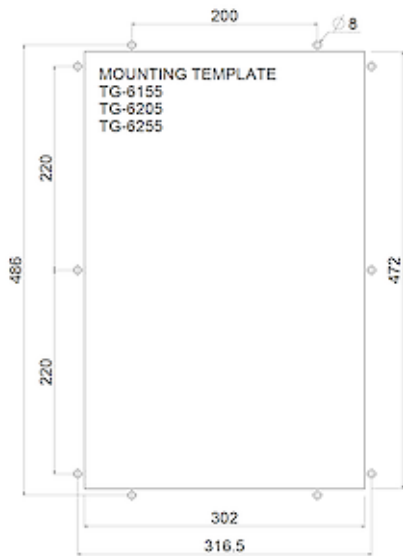

## Order Information

<b>Stainless steel AISI 316 (V4A) housing with chromed heat sinks part no.</b>	61553234
<b>Verpackungsmaße</b>	586.6 x 354 x 227 mm
<b>Bruttogewicht</b>	21.5 kg
<b>Taric code</b>	84158300