

## Thermoelectric cooler




## Description

<b>Order Number:</b>	6405303
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Note:</b>	The torque for the mounting nuts should be 4.5 Nm.
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	1370 BTU
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 141 / 191 cfm Cabinet air circuit: 141 / 191 cfm
<b>Mounting:</b>	Recessed
<b>Dimension H x W x D:</b>	600 x 432 x 199 (135+64) mm
<b>Weight:</b>	75 lbs.
<b>Cut out dimensions:</b>	15 x 21.6 inch
<b>Voltage / Frequency:</b>	120 V, 230 V
<b>Current 95F95F:</b>	4.1 A @ 120 V 2.1 A @ 230 V
<b>Starting current:</b>	6.5 A @ 120 V 3.4 A @ 230 V
<b>Max. current:</b>	4.5 A @ 120 V 2.3 A @ 230 V
<b>Nominal power 95F95F:</b>	490 W
<b>Max. power:</b>	537 W
<b>Fuse:</b>	7 A (T) @ 120 V 4 A (T) @ 230 V
<b>Connection:</b>	8-Pole Connector

**Performance graph:**

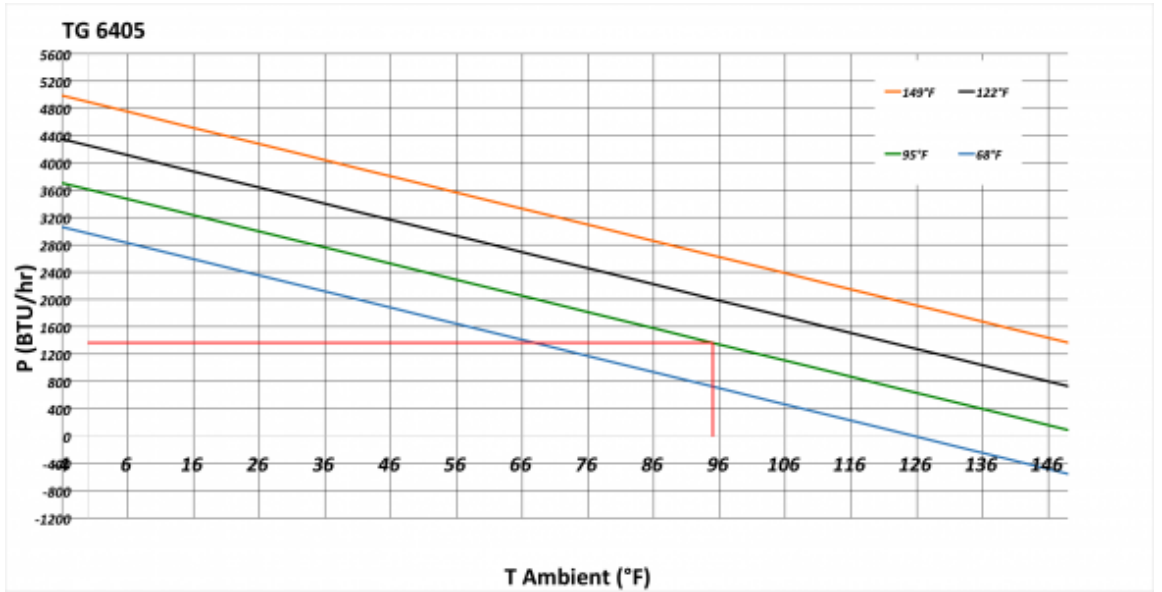

**Cut out dimensions:**

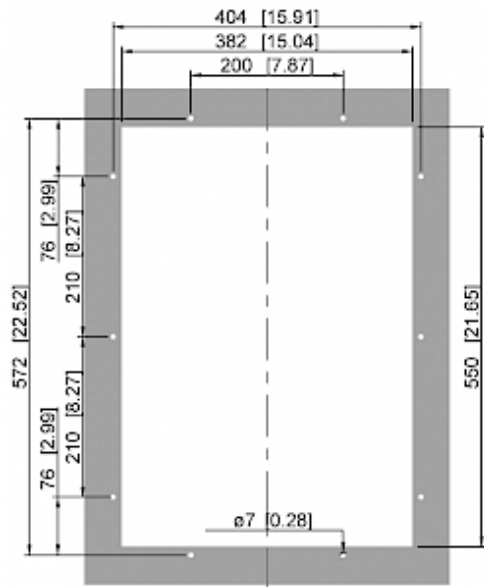

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	64053034
<b>Verpackungsmaße</b>	686.6 x 454 x 232 mm
<b>Bruttogewicht</b>	38 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604350533