

## Thermoelectric cooler




## Description

<b>Order Number:</b>	6805305
<b>Brand Name:</b>	SOLITHERM PELTIER
<b>Housing Material:</b>	Stainless steel AISI 304 (V2A)
<b>Ingress protection:</b>	IP 66 / UL Type 12, 4, 4X
<b>Included:</b>	Kondensatablaufstutzen
<b>Note:</b>	Das Anziehdrehmoment der Schrauben muß 4.5 Nm betragen.
<b>Approvals:</b>	CE, cURus


## Technical data

<b>Cooling capacity 95F/95F:</b>	2730 BTU
<b>Operating temperature range:</b>	-4°F - 149°F
<b>UL temperature range:</b>	-20°C - 65°C
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 280 / 383 cfm Cabinet air circuit: 280 / 383 cfm
<b>Mounting:</b>	External (with frame)
<b>Dimension H x W x D:</b>	38.3 x 20.2 x 8.3 inch
<b>Weight:</b>	154 lbs.
<b>Cut out dimensions:</b>	18.3 x 36.3 inch
<b>Voltage / Frequency:</b>	120 V, 230 V
<b>Current 95F95F:</b>	8.2 A @ 120 V 4.3 A @ 230 V
<b>Starting current:</b>	14 A @ 120 V 8 A @ 230 V
<b>Max. current:</b>	9 A @ 120 V 4.7 A @ 230 V
<b>Nominal power 95F95F:</b>	979 W
<b>Max. power:</b>	1078 W
<b>Fuse:</b>	13 A (T) @ 120 V 7 A (T) @ 230 V
<b>Connection:</b>	8-Pole Connector

**Performance graph:**

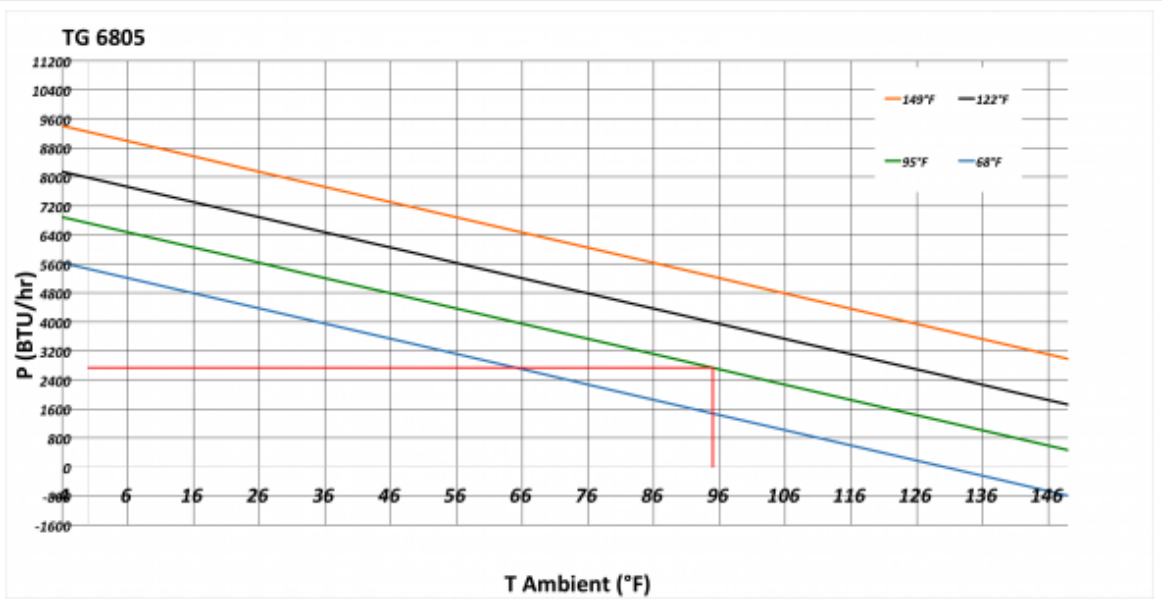

**Cut out dimensions:**

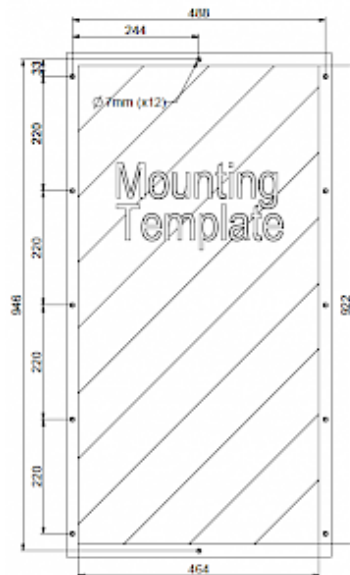

## Order Information

<b>Stainless steel AISI 316 (V4A) housing part no.</b>	68053054
<b>Verpackungsmaße</b>	1060 x 612 x 260 mm
<b>Bruttogewicht</b>	79.5 kg
<b>Taric code</b>	84158300
<b>GTIN (EAN)</b>	5350604350595