

Enclosure air conditioner




Description

Order Number:	43040001
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	1230 BTU
Cooling capacity 95F/122F:	750 BTU
Compressor type:	Reciprocating compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	79 g / 2.78 oz
High / low pressure:	25 / 6 bar 365 / 88 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 53 / 147 cfm Cabinet air circuit: 68 / 80 cfm
Mounting:	External
Dimension H x W x D:	19.75 x 11.02 x 7.87 in.
Weight:	40 lbs.
Cut out dimensions:	18.90 x 9.45 in.
Voltage / Frequency:	230 V ~ 50/60 Hz
UL Voltage / Frequency:	230 V ~ 60 Hz
Current 95F95F:	1.9 A @ 50 Hz 2.0 A @ 60 Hz
Starting current:	6.1 A
Max. current:	2.8 A
Nominal power 95F95F:	335 W @ 50 Hz 380 W @ 60 Hz
Max. power:	550 W
Fuse:	6 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

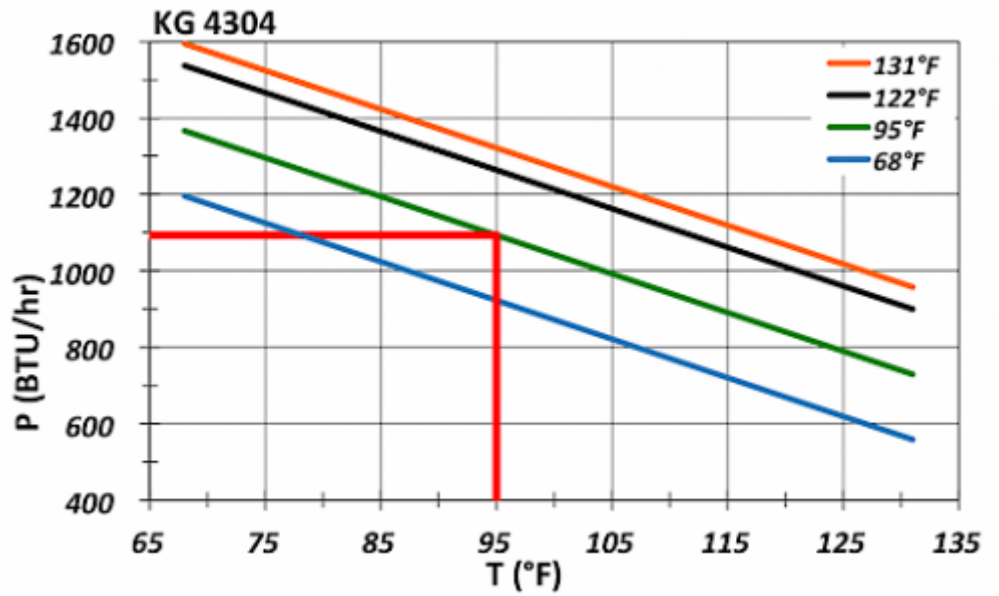

Air flow:

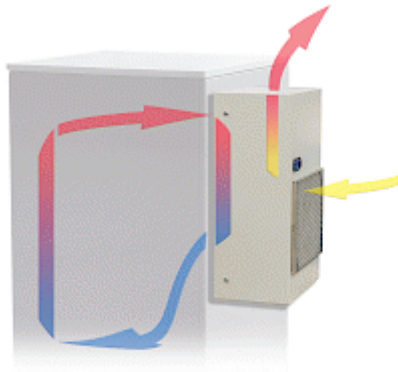

Cut out dimensions:

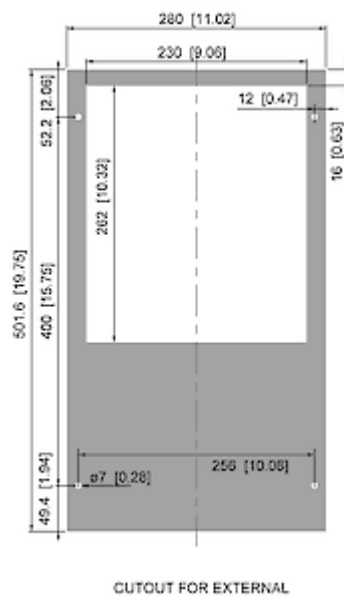

Bestellinformationen

Mit Edelstahlgehäuse Bestell Nr.	4304002
Verpackungsmaße	535 x 323 x 225 mm
Bruttogewicht	19 kg
Taric code	84158200
GTIN (EAN)	5350604360006