

## Enclosure air conditioner




### Description

<b>Order Number:</b>	43151001
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	TYPE 12
<b>Approvals:</b>	CE, cURus, cULus


## Technical data

<b>Cooling capacity 95F/95F:</b>	5,560 BTU
<b>Cooling capacity 95F/122F:</b>	4,500 BTU
<b>Compressor type:</b>	Reciprocating compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	420 g / 14.8 oz
<b>High / low pressure:</b>	25.5 / 6 bar 370 / 88 psig
<b>Operating temperature range:</b>	50°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 280 / 500 cfm Cabinet air circuit: 225 / 324 cfm
<b>Mounting:</b>	External
<b>Dimension H x W x D:</b>	38.6 x 15.5 x 10.2 inch
<b>Weight:</b>	105 lbs.
<b>Cut out dimensions:</b>	36.22 x 13.19 in.
<b>Voltage / Frequency:</b>	120 V ~ 60 Hz
<b>UL Voltage / Frequency:</b>	115 V ~ 60 Hz
<b>Current 95F95F:</b>	9.6 A
<b>Starting current:</b>	39.4 A
<b>Max. current:</b>	11.8 A
<b>Nominal power 95F95F:</b>	880 W
<b>Max. power:</b>	1.29 kW
<b>Fuse:</b>	16 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	Connection terminal block


**Performance graph:**

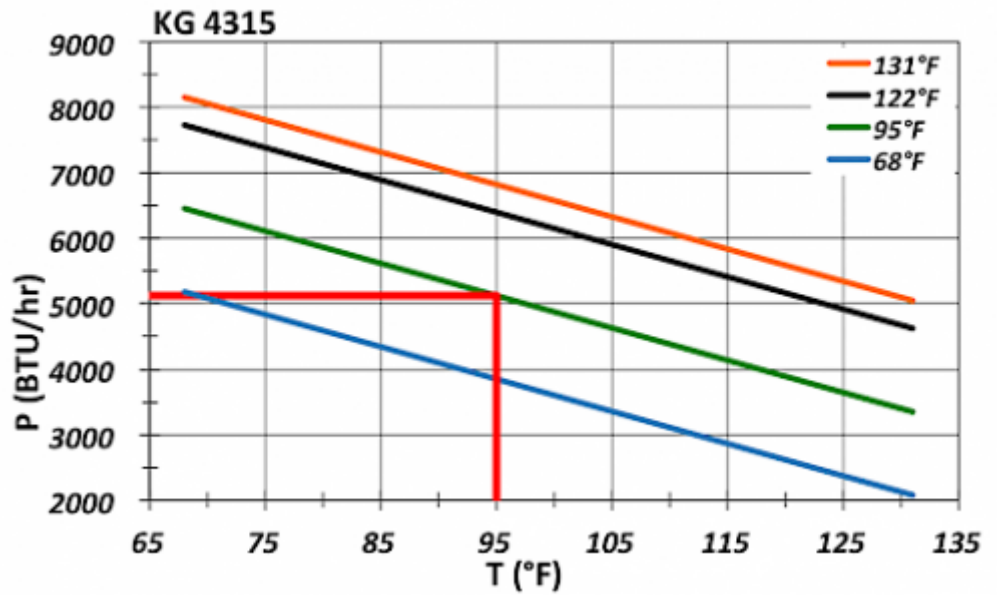

**Air flow:**

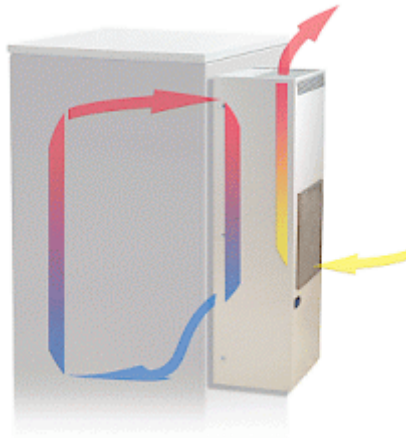

**Cut out dimensions:**

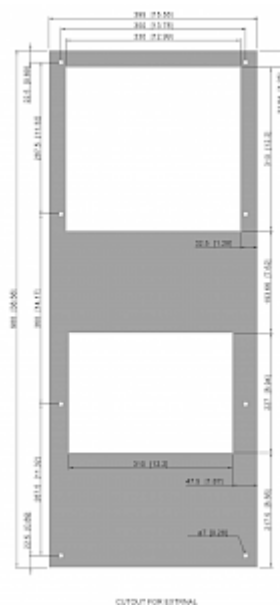

## Bestellinformationen

<b>Stainless steel housing part no.</b>	4315102
<b>Mit Kondensatverdunstung Bestell Nr.</b>	43151101
<b>Verpackungsmaße</b>	1,015 x 443 x 295 mm
<b>Bruttogewicht</b>	49.5 kg
<b>Taric code</b>	84158200
<b>GTIN (EAN)</b>	5350604360662