

Enclosure air conditioner




Description

Order Number:	43301081
Color:	RAL 7035
Housing Material:	Mild steel, powder coated
Ingress protection:	TYPE 12
Approvals:	CE, cURus, cULus


Technical data

Cooling capacity 95F/95F:	10,240 BTU
Cooling capacity 95F/122F:	8,260 BTU
Compressor type:	Rotary piston compressor
Refrigerant / GWP:	R134a / 1430
Refrigerant charge:	900 g / 31.7 oz
High / low pressure:	29.5 / 6 bar 425 / 88 psig
Operating temperature range:	50°F - 131°F
Air volume flow (system / unimpeded):	Ambient air circuit: 441 / 706 cfm Cabinet air circuit: 506 / 706 cfm
Mounting:	Recessed
Dimension H x W x D:	51 x 21.9 x 13.4 inch
Weight:	165 lbs.
Cut out dimensions:	19.4 x 48.6 inch
Voltage / Frequency:	120 V ~ 60 Hz
UL Voltage / Frequency:	115 V ~ 60 Hz
Current 95F95F:	15.3 A
Starting current:	49 A
Max. current:	18.4 A
Nominal power 95F95F:	1.37 kW
Max. power:	1.65 kW
Fuse:	20 A (T)
Short-circuit current rating:	5 kA
Connection:	Connection terminal block


Performance graph:

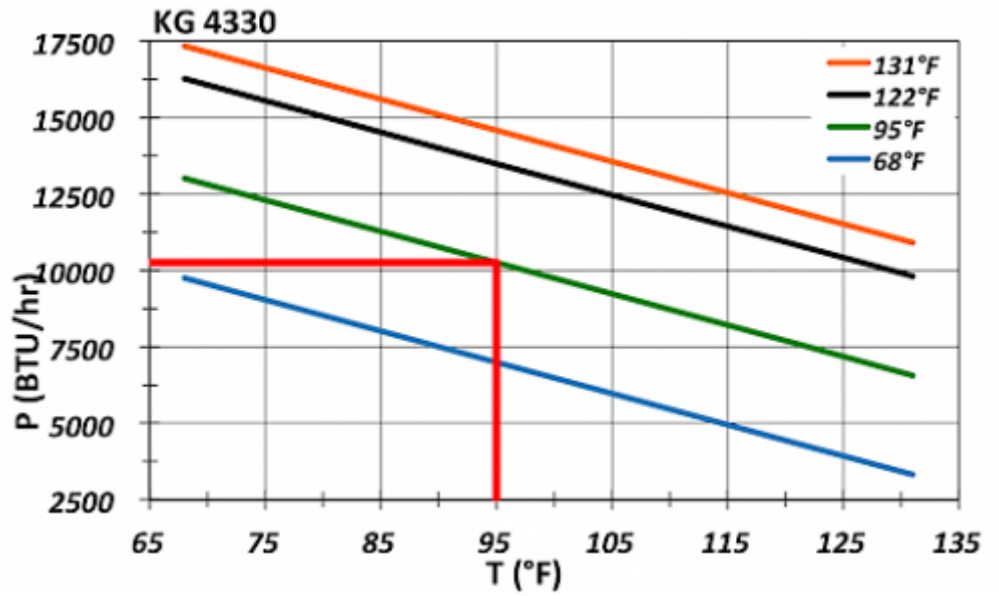

Air flow:

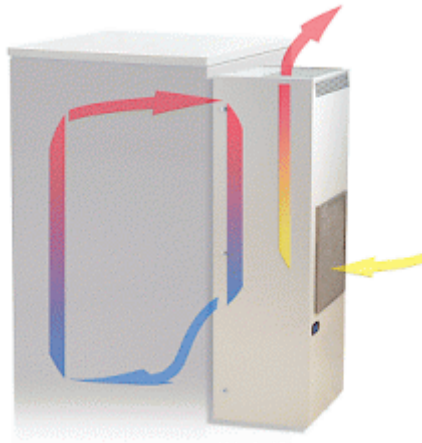

Cut out dimensions:

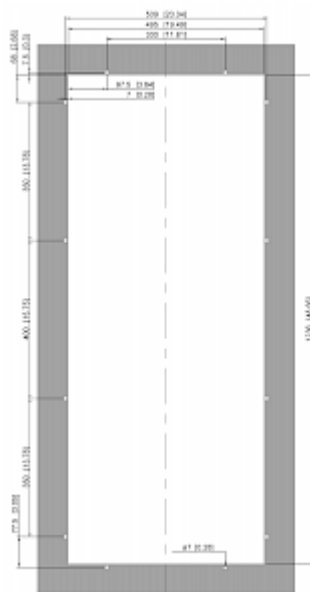

Bestellinformationen

Stainless steel housing part no.	43301026
Taric code	84158200
GTIN (EAN)	5350604361140