

## Enclosure air conditioner




## Description

<b>Order Number:</b>	43400081
<b>Brand Name:</b>	COMPACT INDOOR
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	TYPE 12
<b>Approvals:</b>	CE, cURus, cULus


## Technical data

<b>Cooling capacity 95F/95F:</b>	13650 BTU
<b>Cooling capacity 95F/122F:</b>	11460 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	855 g / 30.15 oz
<b>High / low pressure:</b>	28 / 6 bar 406 / 88 psig
<b>Operating temperature range:</b>	50°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 618 / 883 cfm Cabinet air circuit: 506 / 706 cfm
<b>Mounting:</b>	Recessed
<b>Dimension H x W x D:</b>	51 x 21.9 x 13.4 inch
<b>Weight:</b>	156.5 lbs.
<b>Cut out dimensions:</b>	19.4 x 48.6 inch
<b>Voltage / Frequency:</b>	230 V ~ 50/60 Hz
<b>UL Voltage / Frequency:</b>	230 V ~ 60 Hz
<b>Current 95F95F:</b>	8.9 A @ 50 Hz 10.2 A @ 60 Hz
<b>Starting current:</b>	29.6 A
<b>Max. current:</b>	14.2 A
<b>Nominal power 95F95F:</b>	1.88 kW @ 50 Hz 2.31 kW @ 60 Hz
<b>Max. power:</b>	2.40 kW @ 50 Hz 3.72 kW @ 60 Hz
<b>Fuse:</b>	20 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	Connection terminal block


**Performance graph:**

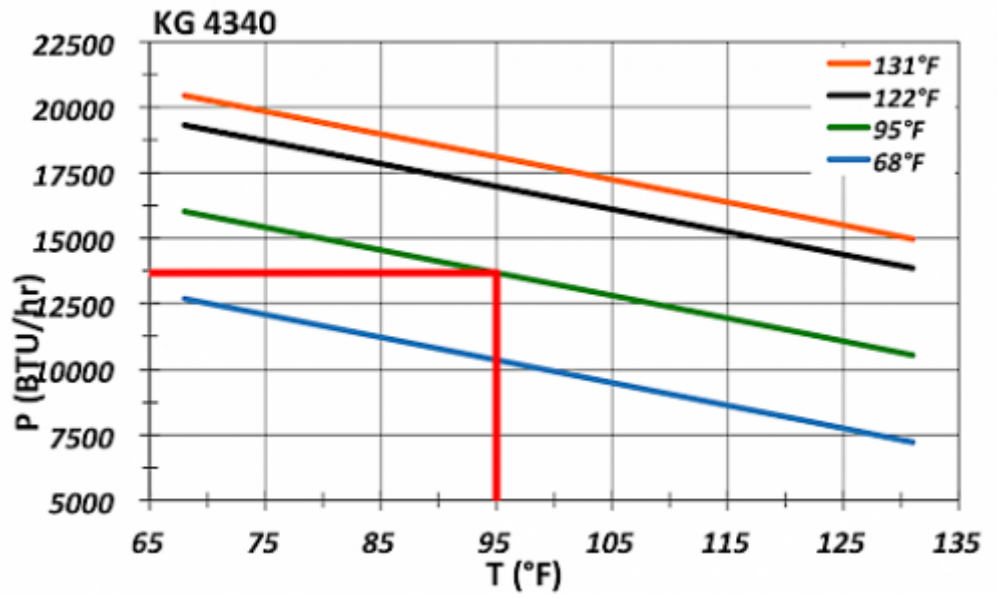

**Air flow:**

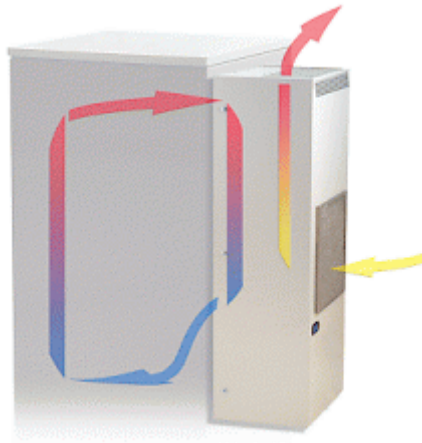

**Cut out dimensions:**

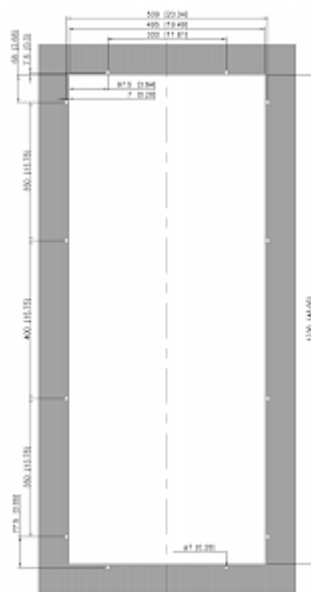

## Order Information

<b>Stainless steel housing part no.</b>	43400026
<b>Taric code</b>	84158200
<b>GTIN (EAN)</b>	5350604361249