

## Enclosure air conditioner




## Description

<b>Order Number:</b>	43402001
<b>Brand Name:</b>	COMPACT INDOOR
<b>Color:</b>	RAL 7035
<b>Housing Material:</b>	Mild steel, powder coated
<b>Ingress protection:</b>	TYPE 12
<b>Approvals:</b>	CE, cURus, cULus


## Technical data

<b>Cooling capacity 95F/95F:</b>	13650 BTU
<b>Cooling capacity 95F/122F:</b>	11460 BTU
<b>Compressor type:</b>	Rotary piston compressor
<b>Refrigerant / GWP:</b>	R134a / 1430
<b>Refrigerant charge:</b>	982 g / 34.6 oz
<b>High / low pressure:</b>	28 / 6 bar 406 / 88 psig
<b>Operating temperature range:</b>	50°F - 131°F
<b>Air volume flow (system / unimpeded):</b>	Ambient air circuit: 618 / 883 cfm Cabinet air circuit: 506 / 706 cfm
<b>Mounting:</b>	External
<b>Dimension H x W x D:</b>	48.4 x 19.7 x 13.4 inch
<b>Weight:</b>	160 lbs.
<b>Cut out dimensions:</b>	44.48 x 16.92 inch
<b>Voltage / Frequency:</b>	380-415 V 50 Hz 3~ 400-460 V 60 Hz 3~
<b>UL Voltage / Frequency:</b>	400/460 V ~ 60 Hz 3~
<b>Current 95F95F:</b>	2.9 A @ 50 Hz 2.7 A @ 60 Hz
<b>Starting current:</b>	8.2 A / 8.5 A
<b>Max. current:</b>	4.6 A / 4.4 A
<b>Nominal power 95F95F:</b>	1.91 kW @ 50 Hz 2.33 kW @ 60 Hz
<b>Max. power:</b>	2.43 kW @ 50 Hz 3.30 kW @ 60 Hz
<b>Fuse:</b>	3 x 6 A (T)
<b>Short-circuit current rating:</b>	5 kA
<b>Connection:</b>	Connection terminal block


**Performance graph:**

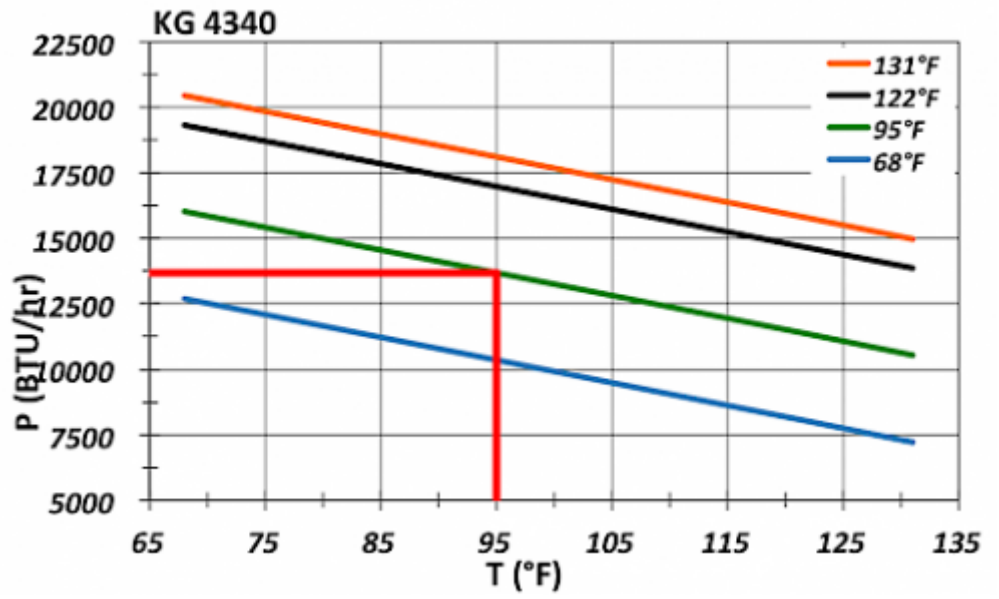

**Air flow:**

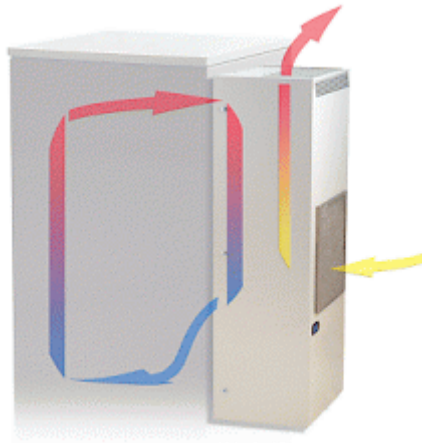

**Cut out dimensions:**

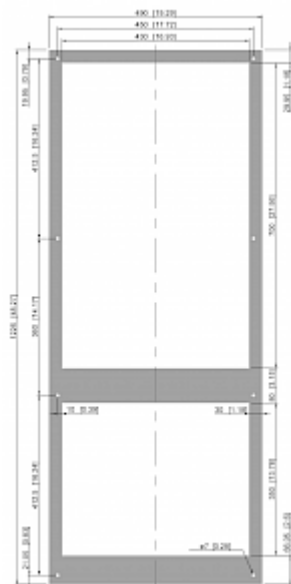

## Order Information

<b>Stainless steel housing part no.</b>	4340202
<b>Mit Kondensatverdunstung Bestell Nr.</b>	43402101
<b>Verpackungsmaße</b>	1,265 x 543 x 375 mm
<b>Bruttogewicht</b>	76.5 kg
<b>Taric code</b>	84158200