

Filter Fan



Description


Order Number:	4411D2000
Color:	RAL 7035
Housing Material:	ABS Plastic
Ingress protection:	NEMA 12
Optional:	Different housing colours available on request With NEMA 3R protection part no. 4411D2030
Approvals:	CE, cULus, CSA

Technical data


Operating temperature range:	14°F - +131°F
Air volume flow (system / unimpeded):	59 cfm
Air volume flow unimpeded:	59 cfm
Static pressure:	0.24 inH2O
Dimension H x W x D:	8.0 x 8.0 x 3.8 inch
Weight:	2.0 lbs
Cut out dimensions:	7.0 x 7.0 (+0.06) inch
Voltage / Frequency:	24 V DC
Rated current:	0.342 A
Power consumption:	8.2 W
Degree of separation:	85% - DIN 24185
Wall thickness:	0.04 - 0.08 in.
Filter class:	G3 according to EN 779
Installation:	Elastic clips or by 4 self-threading screws
Noise level:	42 dB(A)

Air flow:

Q = Air flow [m³/h]
 P = Static pressure [Pa]

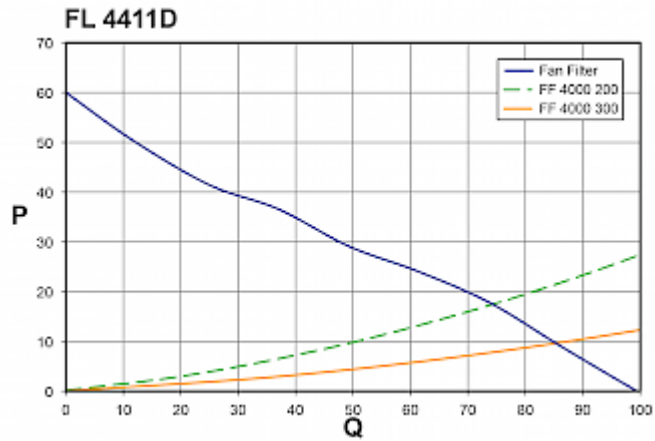

Cut out dimensions:

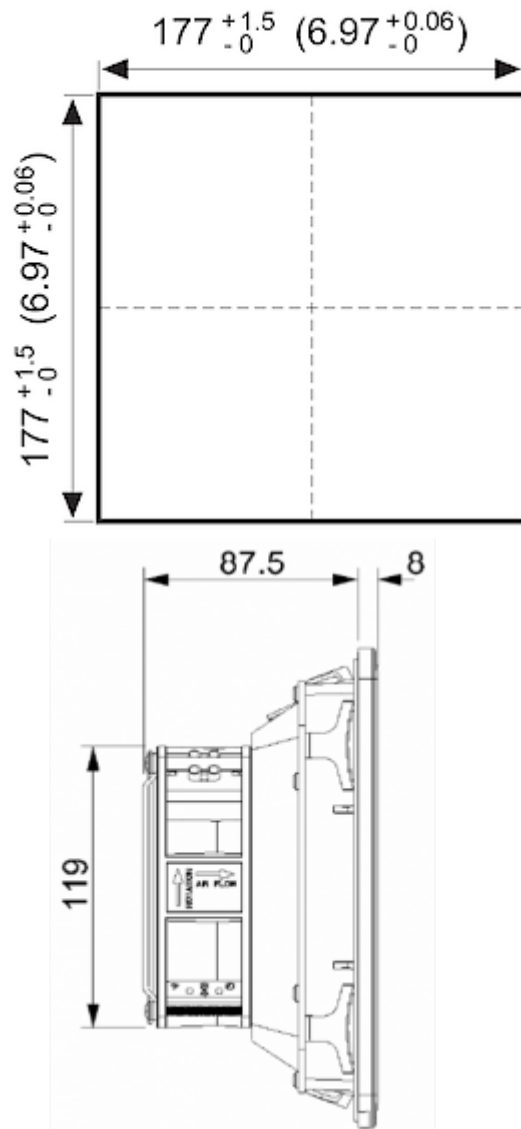

Order Information

With NEMA 3R protection part no.	4411D2030
Taric code	84145915
GTIN (EAN)	5350604100381